

## Secure-Cam

---

The **Secure-Cam** is a vandal resistant indoor digital surveillance camera for use in unattended or vandal prone areas. The high sensitivity camera captures high-resolution colour images in low light conditions when motion is detected. The images are stored on a removable memory card for easy viewing on a computer or PDA. The camera can also be configured to capture images on a time-lapse basis.

The colour camera can store up to 32,000 images and will optionally overwrite the oldest images when the memory card is full - for '**set and forget**' operation.

When powered by the 7.5 Ah battery and utilising its patented ultra low power video processing technology, the camera can operate for up to **15 weeks** when capturing **200 photos per day**, every day of the week! **The camera can also be powered from an external mains plug pack.**

The Camera is ideal for monitoring High Risk retail outlets, Buses, Trains, Railway Stations, Games Rooms, Drink & Food dispensing areas etc.

### FEATURES


- High sensitivity image sensor for low light operation
- 200 photos a day for 15 weeks from the 7.5AH battery (without re-charging)
- Lockable stainless steel case
- Set and forget operation
- High quality glass camera lens
- Customised image-capture sequence & Pre-Trigger image capture
- Event-Triggered or Time-Lapse camera modes.
- Time and date stamped images with programmable text overlay
- Flexible scheduler for independent arming and disarming
- Time and date stamped event log
- Image encryption for security
- High speed image viewer included with setup software
- Digital signature including camera ID, within each image for legal verification
- Optional Black & White image sensor for very low light applications
- Patented PSIS Technology generates high quality digital images, ideal for identifying individuals



*(These images were taken from a secure cam)*



# Secure-Cam

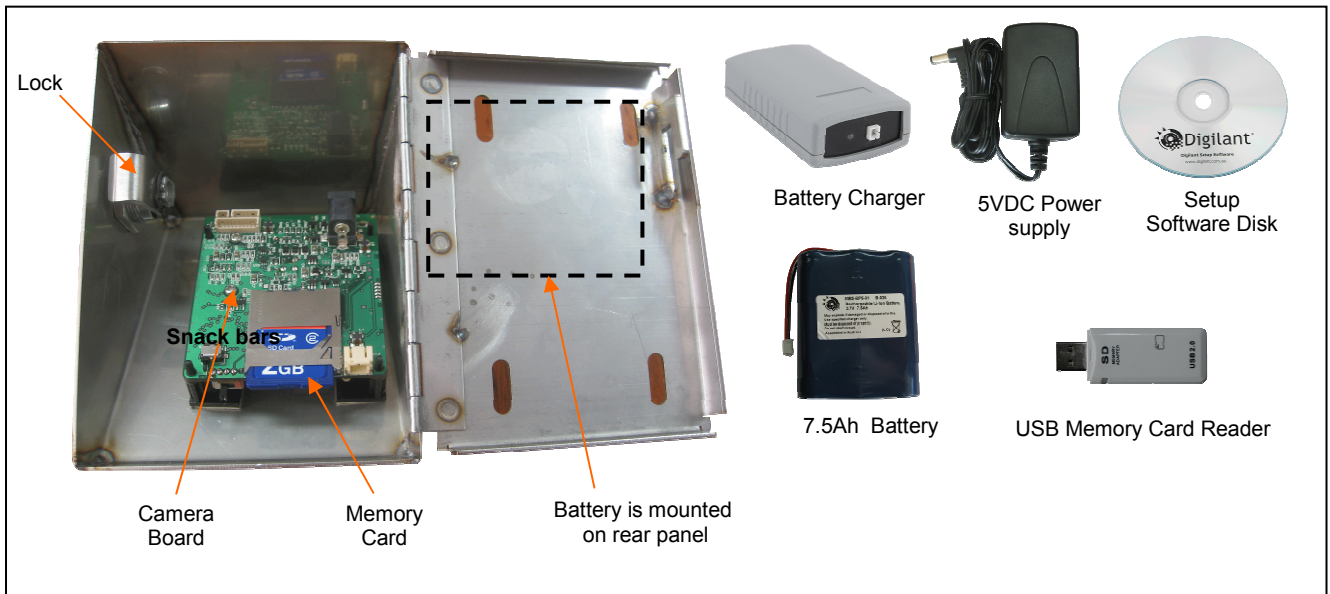

## SPECIFICATIONS

<b>Image Type</b>	Colour or B&W, JPEG compressed VGA (640x480pixels), QVGA (320x240)
<b>Camera Lenses</b>	<b>Wide angle:</b> 3.3mm, AOV: 73° (D) x 61° (H) x 47° (V)
<b>Camera Angle</b>	30° from vertical
<b>Image Sensor Sensitivity</b>	<b>Colour:</b> 3.8 V/Lux-sec, <b>B&amp;W:</b> 4.9 V/Lux-sec
<b>Motion Sensor</b>	<b>Type:</b> PIR (Spot) <b>Range:</b> 0-5 m (16') (Typical), 0-9 m (30') (maximum) <b>Field Of View:</b> 38° horizontal, 22° vertical
<b>Memory Card</b>	MMC™ Card (v4.2) or SD™ Card (v1.1), <b>FAT16</b> file format
<b>Storage Capacity</b>	<b>2GB Memory Card:</b> VGA: 32,000 images, QVGA: 65,000 images
<b>External Power Supply</b>	5VDC, 250 mA
<b>Optional Battery Packs</b>	Lithium Ion, 3.7V - 7.5Ah, 3Ah, 0.8Ah
<b>Power Consumption</b>	Standby: 1.9 mA, Running: 100 mA, Charging: 200 mA
<b>Dimensions</b>	125 x 95 x 65 mm (4.9" x 3.7" x 2.6")
<b>Weight</b>	418g (14.7 oz)
<b>Operating Temperature</b>	-20°C to +60°C (-4° F to +140° F)
<b>PC Software Requirements</b>	Windows 2000 (SP4), Windows XP (SP2), Windows Vista

